



FEATURES


- 10.4" TFT LED Capacitive / Resistive Touch
- CPU: Intel Core 8th Gen i3 8145U / i5 8265U / i7 8565U (Optional)
- 1x DDR4L 2400MHz 4GB, Up to 64GB
- 2xLAN, 2xRS232/422/485, 8KV Static Electricity & 600W TVS Surge Protection
- Built-in TPM2.0 for Hardware based Security
- Wide voltage DC 9V~36V, Overcurrent, Overvoltage & Reverse Connection Protection
- 20°C ~ 70°C extended operating temperature
- IP66 Compliant Front Panel

SPECIFICATIONS

System		Touch screen	
CPU	Intel Core i3-8145U / i5-8265U / i7-8565U	Touch Screen Type	Capacitive / Resistive Touch
L2 Cache	4MB / 6MB / 8MB	Transmittance	>90%
Memory	DDR4L 2400MHz 4GB, Up to 64GB	Response Time	<5ms
Harddisk	1 x mSATA 64G SSD / (120G / 250G / 500G SSD) Optional	Surface Hardness	≥7H
Graphics	Intel HD Graphics 620	Supply Voltage	5.0V DC
Network	Intel® I211-AT GbE LAN	Touch Life	≥ 3000W
Audio	Realtek ACL662 Audio controller	Instituional	
TPM	TPM 2.0	Material	High-strength Al-alloy, support IP66
Operation System	Windows 10 / 11 / Linux, Ubuntu, Debian	Color	Black
I / O		VESA Mounting	VESA: 100 x 100 mm
HDMI	1 x H-DMI	Waterproof Rate	IP65 / IP66
LAN	2 x LAN	Product Dimension	275 x 222 x 58 mm
USB	3 x USB 3.0 / 1 x USB 2.0	Cut-out Size	263 x 210 mm
COM	2 x RS-232 / 422 / 485	Packing Size	360 x 180 x 320 mm
Audio	1x Audio_out & Mic_in	Gross Weight	4 KG
Wireless Network	WiFi / Bluetooth (4G / 5G Optional)	Power and Environment	
Other I/O Interface	1 x Power Switch	Operating Temperature	-20~70°C
LCD Panel		Storage Temperature	-30~80°C(-22~176°F)
Panel Size	10.4" Led	Relative Humidity	5%~95%@40°C, non-condensing
Resolution	1024 x 768	Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
Aspect Ratio	4:3		
Display Brightness	350 cd/m2	External Power Supply	AC 100 - 240V~50/60Hz, 1.5A
Backlight Lifetime	30000 Hr (min.)	Working Voltage	DC IN 9V~36V
Viewing Angle	80 / 80 / 65 / 75 (CR≥10) (L / R / U / D)	Power Consumption	≤35W



Dimension & I/O

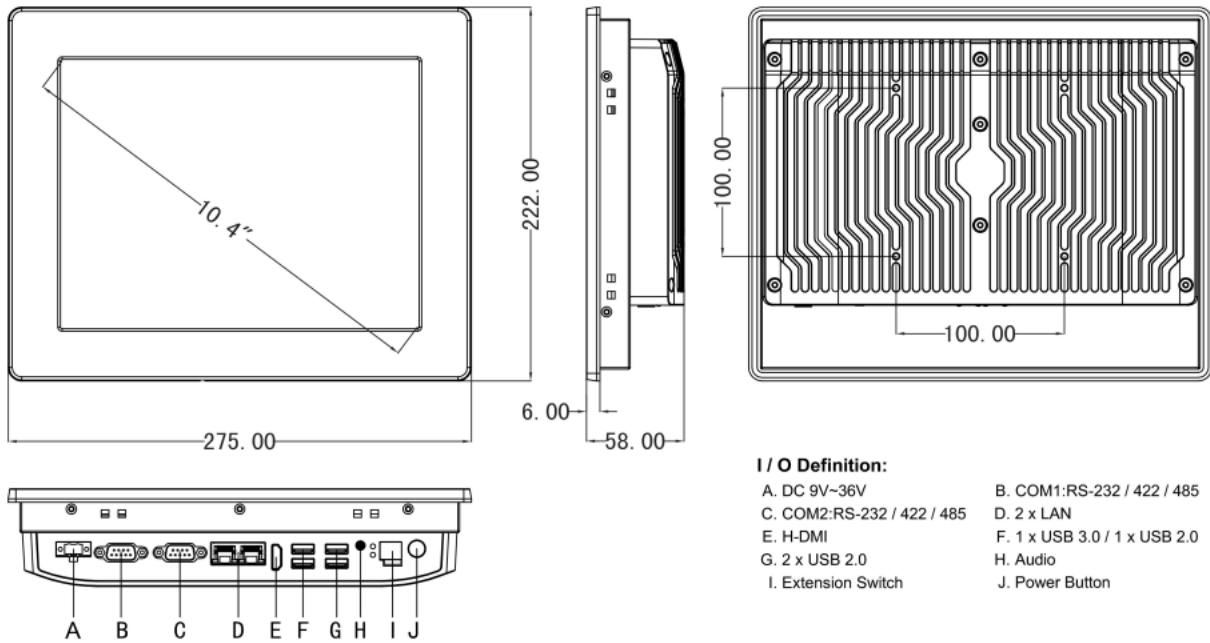

- I / O Definition:**
- A. DC 9V~36V
 - B. COM1:RS-232 / 422 / 485
 - C. COM2:RS-232 / 422 / 485
 - D. 2 x LAN
 - E. H-DMI
 - F. 1 x USB 3.0 / 1 x USB 2.0
 - G. 2 x USB 2.0
 - H. Audio
 - I. Extension Switch
 - J. Power Button

Panel Cutout Dimensions: 263 x 210 mm (10.35 x 8.27 in)

ORDERING INFORMATION

PACKING LIST

- 1x AS10.4-I5-LC1 Series Industrial Panel PC
- 1x Utility DVD Driver
- 8x Embedded Buckles
- 1x Power Adaptor

AVAILABLE MODELS

Display Size	Resolution	Format	Brightness(cd/m2)	Viewing Angle	LCD Color	Backlight MTBF
10.4"	800x600/1024x768	4:3	350 cd/m ²	80/80/65/75	262K/16.2M	30000 Hr (min.)
12.1"	800x600/1024x768	4:3	400 cd/m ²	80/80/65/75	262K/16.7M	30000 Hr (min.)
12.1"	1280x800	16:10	600cd/m ²	88/88/88/88	262K/16.7M	50000 Hr (min.)
15"	1024x768	4:3	350cd/m ²	89/89/89/89	262K/16.2M	50000 Hr (min.)
15.6"	1920x1080	16:9	600cd/m ²	89/89/89/89	262K/16.2M	50000 Hr (min.)
17"	1280x1024	5:4	400cd/m ²	80/80/70/70	262K/16.7M	50000 Hr (min.)
19"	1280x1024	5:4	450cd/m ²	85/85/80/80	262K/16.7M	50000 Hr (min.)
21.5"	1920x1080	16:9	400cd/m ²	89/89/89/89	262K/16.7M	50000 Hr (min.)

